




Main features


- Amplified output signal
- Temperature limits: -40 ... +600°C
- Tolerance: UNI 7937, IEC 751 standards:
 - ± 0.15°C at 0°C for class A (1/2 DIN)
 - ± 0.30°C at 0°C for class B (1 DIN)
 - ± 0.10°C at 0°C for 1/3 DIN class
- Insulation: > 100 MOhm for voltage values from 10 to 100 Vcc
- PT100 wire-wound resistance thermometer
- Mineral insulated interchangeable insert
- Application versatility

MODELS

AR2 A
without fitting

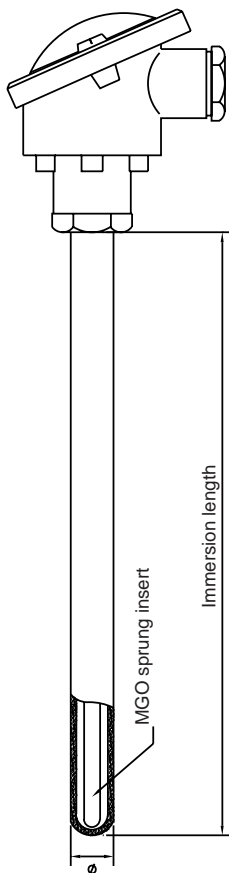

AR2 B
with adjustable flange

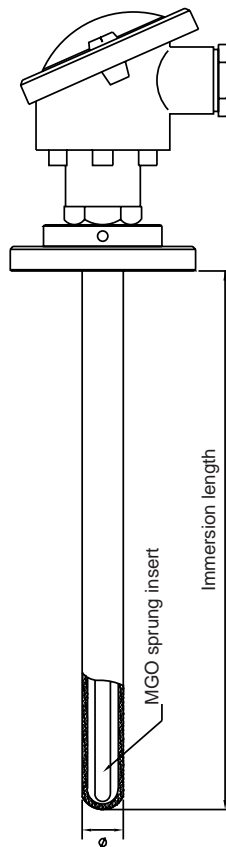

AR2 C
with welded fitting

