




Main features


- Amplified output signal
- Temperature Limits: $-40 \dots +600^{\circ}\text{C}$
- Tolerance: UNI 7937, IEC 751 standards:
 - $\pm 0.15^{\circ}\text{C}$ a 0°C for class A (1/2 DIN)
 - $\pm 0.30^{\circ}\text{C}$ a 0°C for class B (1 DIN)
 - $\pm 0.10^{\circ}\text{C}$ a 0°C for 1/3 DIN class
- Compact mineral insulated (MgO) resistance thermometer element (Pt100 at 0°C) and continuous metal sheath
- Application versatility

MODELS


AR6M A
without fitting

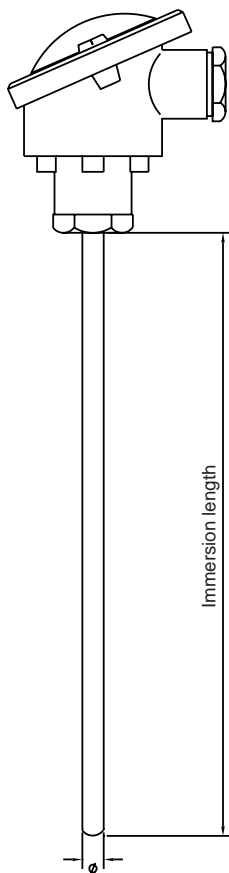

AR6M B
with adjustable
compression fitting

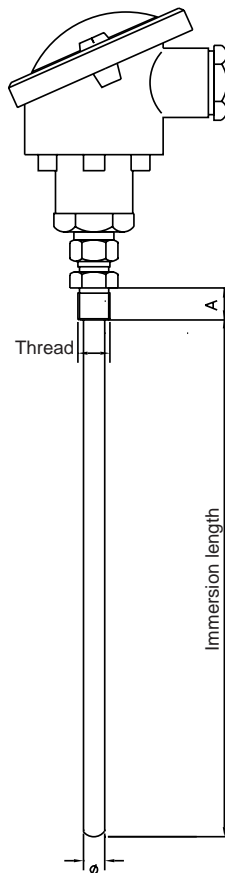

AR6M D
with welded fitting
under the head

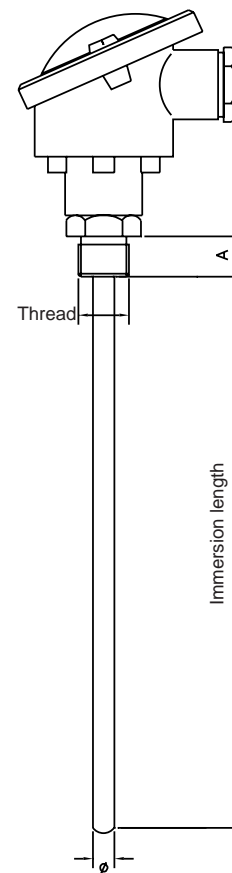

ORDER CODE

<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 10%;">A</td><td style="width: 10%;">R</td><td style="width: 10%;">6</td><td style="width: 10%;">M</td><td style="width: 10%;"></td><td style="width: 10%;"></td><td style="width: 10%;"></td><td style="width: 10%;"></td><td style="width: 10%;"></td><td style="width: 10%;"></td><td style="width: 10%;"></td><td style="width: 10%;"></td> </tr> </table>	A	R	6	M									<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 10%;">0</td><td style="width: 10%;">0</td><td style="width: 10%;">0</td><td style="width: 10%;">X</td><td style="width: 10%;">0</td><td style="width: 10%;">0</td><td style="width: 10%;">0</td><td style="width: 10%;">X</td><td style="width: 10%;"></td><td style="width: 10%;"></td><td style="width: 10%;"></td><td style="width: 10%;"></td><td style="width: 10%;"></td><td style="width: 10%;"></td><td style="width: 10%;"></td> </tr> </table>	0	0	0	X	0	0	0	X																																																																																													
A	R	6	M																																																																																																															
0	0	0	X	0	0	0	X																																																																																																											
<p>CODE</p> <table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <th colspan="2">Model</th> </tr> <tr> <td>Without fitting</td> <td>A</td> </tr> <tr> <td>With adjustable compression fitting</td> <td>B</td> </tr> <tr> <td>With welded fitting under the head</td> <td>D</td> </tr> </table> <table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <th colspan="2">Element + Nr. of Wires</th> </tr> <tr> <td>Single 2 wires</td> <td>1</td> </tr> <tr> <td>Single 3 wires</td> <td>2</td> </tr> </table> <table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <th colspan="2">Precision Class</th> </tr> <tr> <td>PT100 class A (1/2 DIN)</td> <td>A</td> </tr> <tr> <td>PT100 class B (1 DIN)</td> <td>B</td> </tr> <tr> <td>PT100 class (1/3 DIN)</td> <td>C</td> </tr> </table> <table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <th colspan="2">Connection Head</th> </tr> <tr> <td>DIN B</td> <td>C</td> </tr> <tr> <td>DIN BUS</td> <td>E</td> </tr> <tr> <td>EEX d IIC TC6 (SW/S22)</td> <td>F</td> </tr> <tr> <td>EEX d IIB TC5 (GUJP)</td> <td>G</td> </tr> <tr> <td>CEAA</td> <td>H</td> </tr> </table> <table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <th colspan="2">Sheath Material</th> </tr> <tr> <td>AISI 316</td> <td>C</td> </tr> </table> <table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <th colspan="2">Sheath Diameter (mm)</th> </tr> <tr> <td>3</td> <td>E *</td> </tr> <tr> <td>4.5</td> <td>G</td> </tr> <tr> <td>6</td> <td>I</td> </tr> </table> <p>(*) Not available with double element</p> <table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <th colspan="3">Connection Thread *</th> </tr> <tr> <td>1/8" GAS</td> <td>"A"= 10mm</td> <td>A</td> </tr> <tr> <td>1/4" GAS</td> <td>"A"= 12mm</td> <td>B</td> </tr> <tr> <td>3/8" GAS</td> <td>"A"= 15mm</td> <td>C</td> </tr> <tr> <td>1/2" GAS</td> <td>"A"= 15mm</td> <td>D</td> </tr> <tr> <td>1/8" NPT</td> <td></td> <td>G</td> </tr> <tr> <td>1/4" NPT</td> <td></td> <td>H</td> </tr> <tr> <td>3/8" NPT</td> <td></td> <td>I</td> </tr> <tr> <td>1/2" NPT</td> <td></td> <td>J</td> </tr> </table> <p>(*) To be shown for B, D models only</p> <table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <th colspan="2">Connection Material *</th> </tr> <tr> <td>Nickel-Plated Brass</td> <td>1 **</td> </tr> <tr> <td>300 Series Stainless Steel</td> <td>2</td> </tr> </table> <p>(*) To be shown for B, D models only (**) Available for AR6MB model only</p>	Model		Without fitting	A	With adjustable compression fitting	B	With welded fitting under the head	D	Element + Nr. of Wires		Single 2 wires	1	Single 3 wires	2	Precision Class		PT100 class A (1/2 DIN)	A	PT100 class B (1 DIN)	B	PT100 class (1/3 DIN)	C	Connection Head		DIN B	C	DIN BUS	E	EEX d IIC TC6 (SW/S22)	F	EEX d IIB TC5 (GUJP)	G	CEAA	H	Sheath Material		AISI 316	C	Sheath Diameter (mm)		3	E *	4.5	G	6	I	Connection Thread *			1/8" GAS	"A"= 10mm	A	1/4" GAS	"A"= 12mm	B	3/8" GAS	"A"= 15mm	C	1/2" GAS	"A"= 15mm	D	1/8" NPT		G	1/4" NPT		H	3/8" NPT		I	1/2" NPT		J	Connection Material *		Nickel-Plated Brass	1 **	300 Series Stainless Steel	2	<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <th colspan="2">Certificates</th> </tr> <tr> <td>A</td> <td>Conformity Report</td> </tr> <tr> <td>R</td> <td>Calibration Report</td> </tr> <tr> <td>T</td> <td>SIT Calibr. Report/Certific</td> </tr> </table> <p>LENGTHS AND ACCESSORIES</p> <table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <th colspan="2">Type of Transmitter</th> </tr> <tr> <td>A</td> <td>4 ÷ 20mA</td> </tr> </table> <table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <th colspan="2">Immersion Length (mm)</th> </tr> <tr> <td colspan="2">Standard length from 100 to 2000 mm with 100 mm step</td> </tr> <tr> <td colspan="2">And from 2000 to 10000 mm with 500 mm step</td> </tr> </table> <table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <th colspan="4">Temperature Range in which the Calibration has to be Made</th> </tr> <tr> <td colspan="2">min T</td> <td colspan="2">max T</td> </tr> <tr> <td><input type="text" value=""/></td> <td>°C</td> <td><input type="text" value=""/></td> <td>°C</td> </tr> <tr> <td><input type="text" value="4mA"/></td> <td></td> <td><input type="text" value="20mA"/></td> <td></td> </tr> </table>	Certificates		A	Conformity Report	R	Calibration Report	T	SIT Calibr. Report/Certific	Type of Transmitter		A	4 ÷ 20mA	Immersion Length (mm)		Standard length from 100 to 2000 mm with 100 mm step		And from 2000 to 10000 mm with 500 mm step		Temperature Range in which the Calibration has to be Made				min T		max T		<input type="text" value=""/>	°C	<input type="text" value=""/>	°C	<input type="text" value="4mA"/>		<input type="text" value="20mA"/>	
Model																																																																																																																		
Without fitting	A																																																																																																																	
With adjustable compression fitting	B																																																																																																																	
With welded fitting under the head	D																																																																																																																	
Element + Nr. of Wires																																																																																																																		
Single 2 wires	1																																																																																																																	
Single 3 wires	2																																																																																																																	
Precision Class																																																																																																																		
PT100 class A (1/2 DIN)	A																																																																																																																	
PT100 class B (1 DIN)	B																																																																																																																	
PT100 class (1/3 DIN)	C																																																																																																																	
Connection Head																																																																																																																		
DIN B	C																																																																																																																	
DIN BUS	E																																																																																																																	
EEX d IIC TC6 (SW/S22)	F																																																																																																																	
EEX d IIB TC5 (GUJP)	G																																																																																																																	
CEAA	H																																																																																																																	
Sheath Material																																																																																																																		
AISI 316	C																																																																																																																	
Sheath Diameter (mm)																																																																																																																		
3	E *																																																																																																																	
4.5	G																																																																																																																	
6	I																																																																																																																	
Connection Thread *																																																																																																																		
1/8" GAS	"A"= 10mm	A																																																																																																																
1/4" GAS	"A"= 12mm	B																																																																																																																
3/8" GAS	"A"= 15mm	C																																																																																																																
1/2" GAS	"A"= 15mm	D																																																																																																																
1/8" NPT		G																																																																																																																
1/4" NPT		H																																																																																																																
3/8" NPT		I																																																																																																																
1/2" NPT		J																																																																																																																
Connection Material *																																																																																																																		
Nickel-Plated Brass	1 **																																																																																																																	
300 Series Stainless Steel	2																																																																																																																	
Certificates																																																																																																																		
A	Conformity Report																																																																																																																	
R	Calibration Report																																																																																																																	
T	SIT Calibr. Report/Certific																																																																																																																	
Type of Transmitter																																																																																																																		
A	4 ÷ 20mA																																																																																																																	
Immersion Length (mm)																																																																																																																		
Standard length from 100 to 2000 mm with 100 mm step																																																																																																																		
And from 2000 to 10000 mm with 500 mm step																																																																																																																		
Temperature Range in which the Calibration has to be Made																																																																																																																		
min T		max T																																																																																																																
<input type="text" value=""/>	°C	<input type="text" value=""/>	°C																																																																																																															
<input type="text" value="4mA"/>		<input type="text" value="20mA"/>																																																																																																																

GEFRAN spa reserves the right to make any kind of design or functional modification at any moment without prior notice

GEFRAN

GEFRAN spa
 via Sebina, 74
 25050 PROVAGLIO D'ISEO (BS) - ITALIA
 ph. 0309888.1 - fax. 0309839063
 Internet: <http://www.gefran.com>
www.gefranonline.com

cod. AR6M - 09/04