


Main features


- Temperature limits: $-40 \dots +250^{\circ}\text{C}$
(see table for type of extension cable used)
- Tolerance: UNI 7937, IEC 751 standards:
 - $\pm 0.15^{\circ}\text{C}$ at 0°C for class A (1/2 DIN)
 - $\pm 0.30^{\circ}\text{C}$ at 0°C for class B (1 DIN)
- PT100 at 0°C sensor
- Stainless steel AISI 303 sheath
- Adjustment spring thread connection: 8mm diameter, 300mm length

MODELS


TR5 B: with bayonet fitting

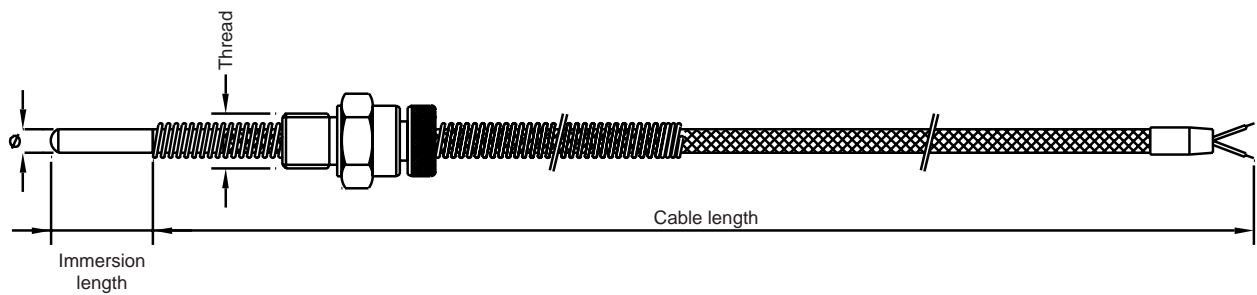

TR5 V: with screw fitting

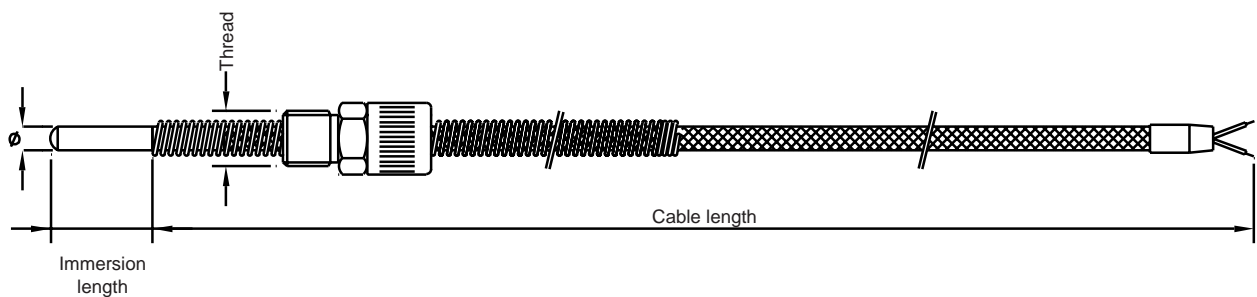

ORDER CODE

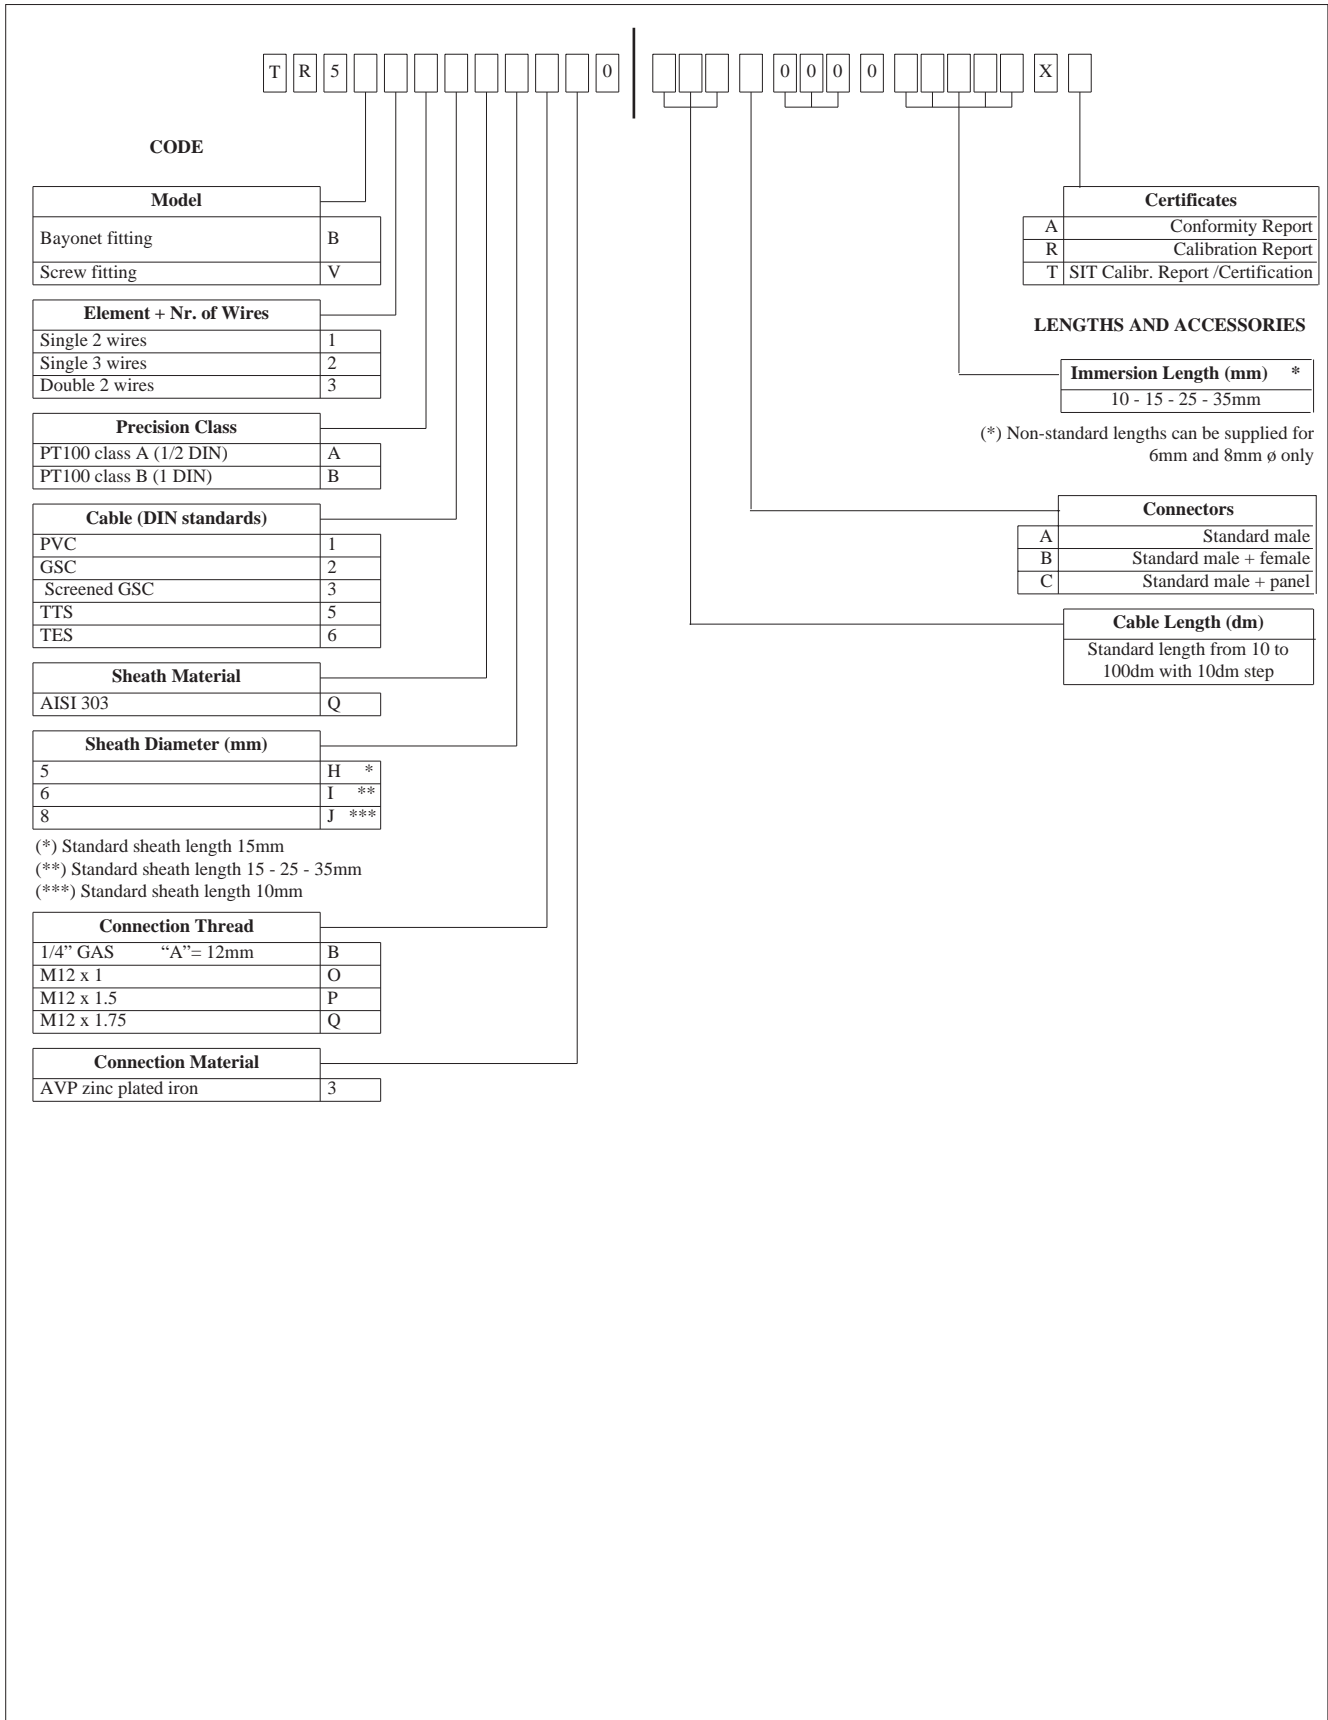

GEFRAN spa reserves the right to make any kind of design or functional modification at any moment without prior notice

GEFRAN spa
 via Sebina, 74
 25050 PROVAGLIO D'ISEO (BS) - ITALIA
 ph. 0309888.1 - fax. 0309839063
 Internet: <http://www.gefran.com>
www.gefranonline.com

GEFRAN

cod. TR5 - 09/04