




Main features


- Temperature limits: $-40 \dots +600^{\circ}\text{C}$
- Tolerance: UNI 7937, IEC 751 standards:
 - $\pm 0.15^{\circ}\text{C}$ at 0°C for class A (1/2 DIN)
 - $\pm 0.30^{\circ}\text{C}$ at 0°C for class B (1 DIN)
 - $\pm 0.10^{\circ}\text{C}$ at 0°C for 1/3 DIN class
- Insulation: Mineral Oxide (MgO)
- PT100 wire-wound resistance thermometer
- Min. size: 100mm including connector

MODELS


TR7M A: without fitting

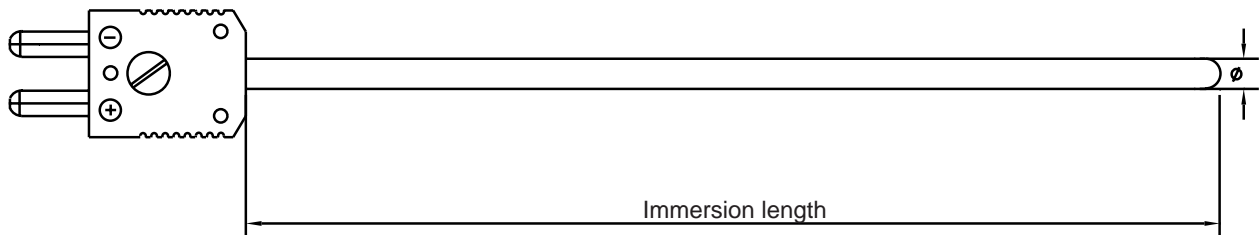

TR7M B: with adjustable compression fitting

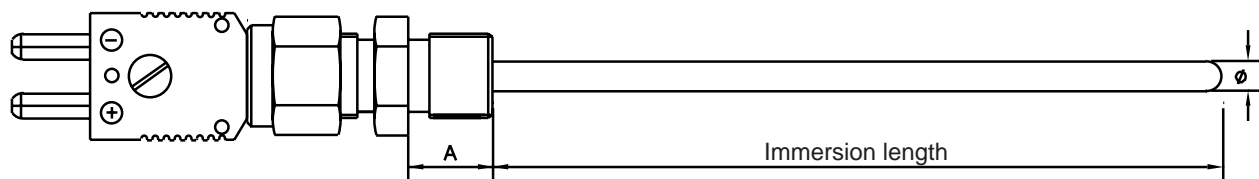

ORDER CODE

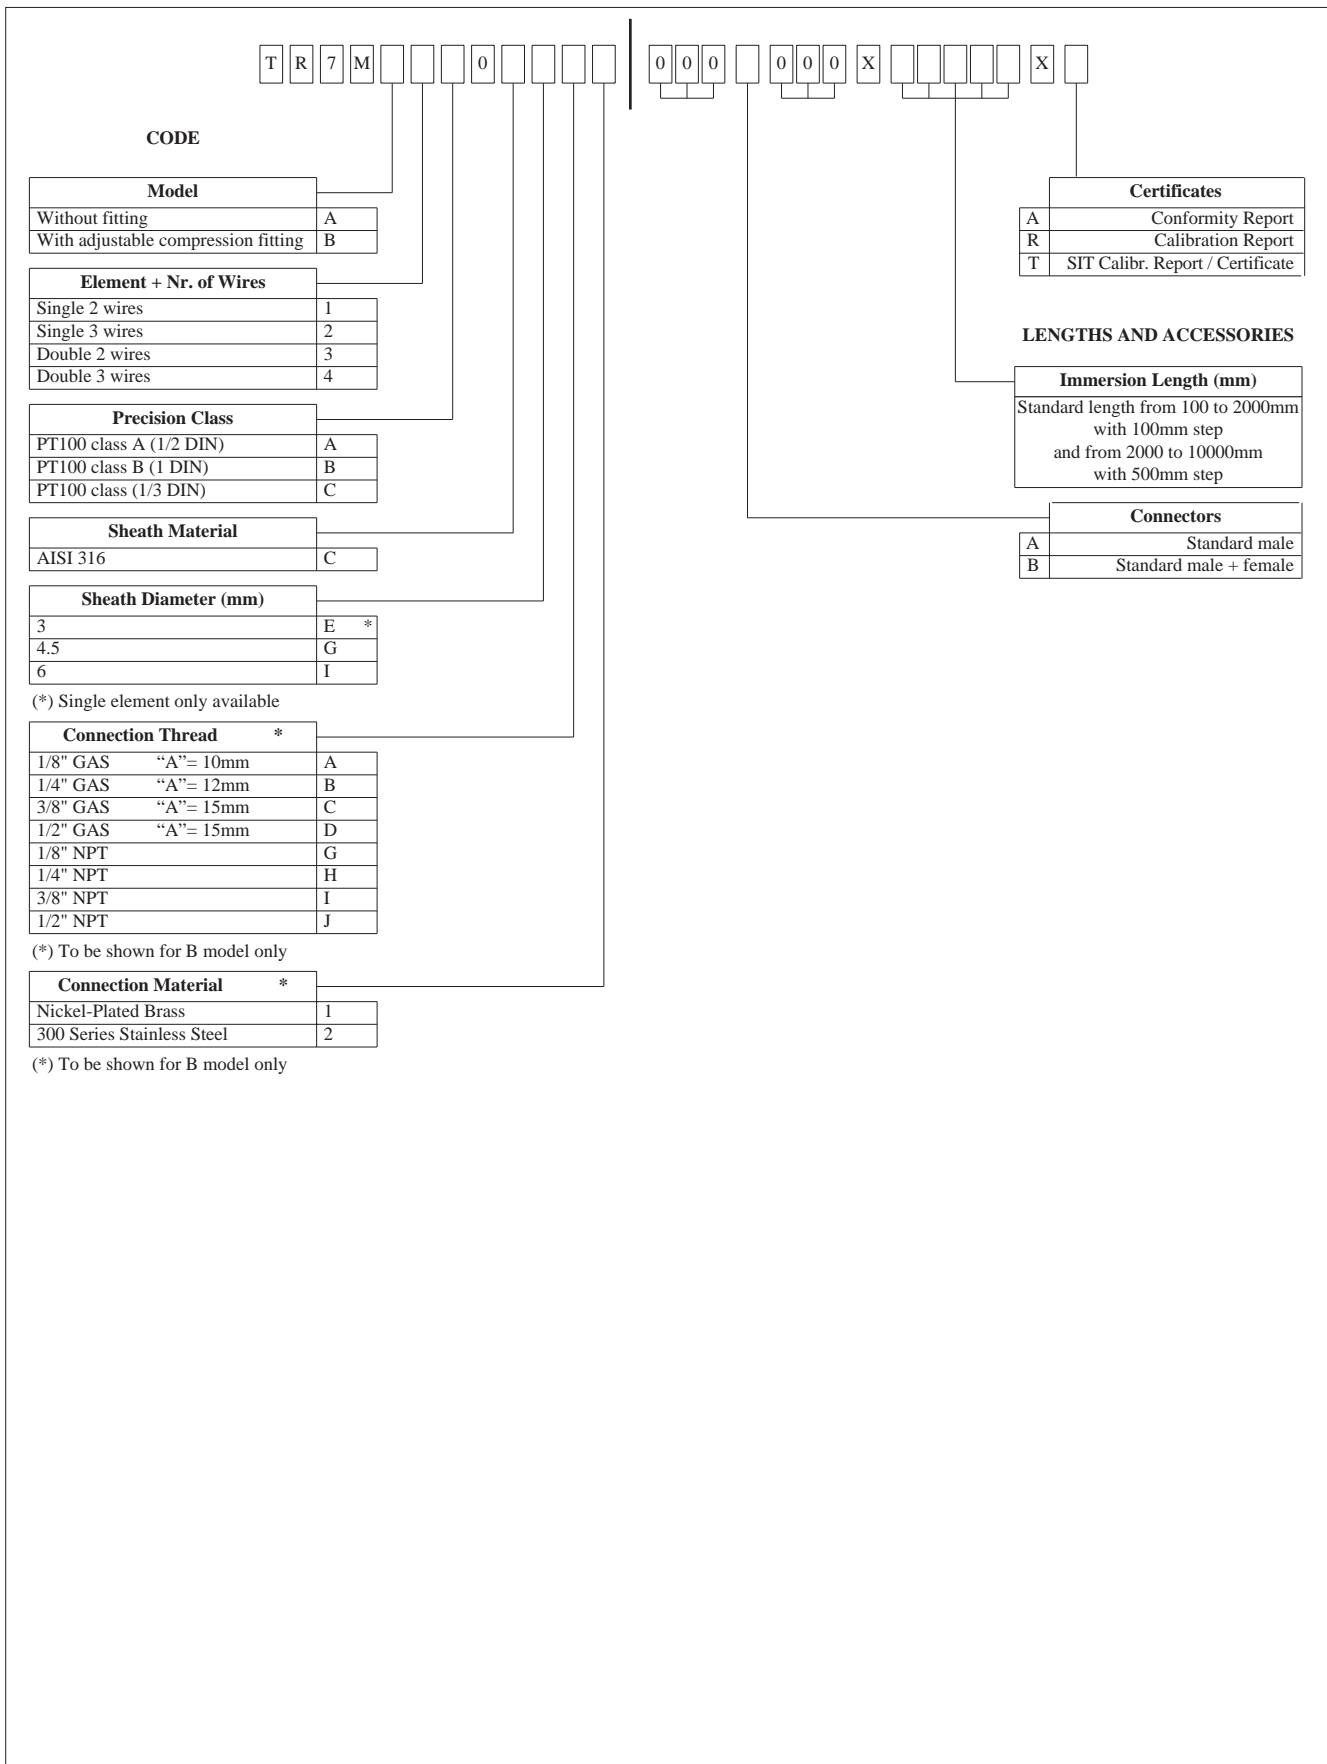

GEFRAN spa reserves the right to make any kind of design or functional modification at any moment without prior notice

GEFRAN spa
 via Sebina, 74
 25050 PROVAGLIO D'ISEO (BS) - ITALIA
 ph. 0309888.1 - fax. 0309839063
 Internet: <http://www.gefran.com>
www.gefranonline.com

GEFRAN

cod. TR7M- 09/04