




### Main features


- Amplified output signal
- Temperature limits:  
 -40 ... + 350°C for type T  
 -40 ... + 550°C for type J  
 -40 ... + 600°C for type E  
 -40 ... +1050°C for type K  
 (see table for sheath diameters)
- Tolerance:  
 UNI 7938, IEC standards 584.2/Class 2:
- Mineral insulated interchangeable insert
- Application versatility

### MODELS

**AC2 A**  
without fitting

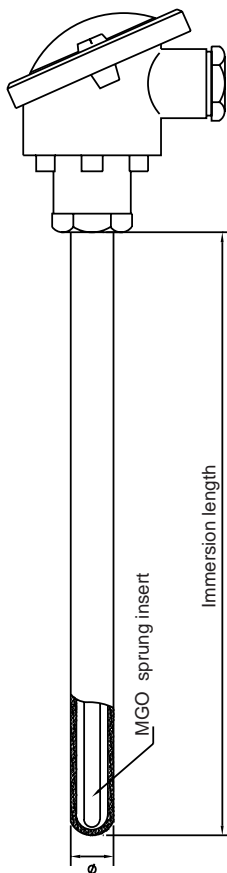

**AC2 B**  
with adjustable flange

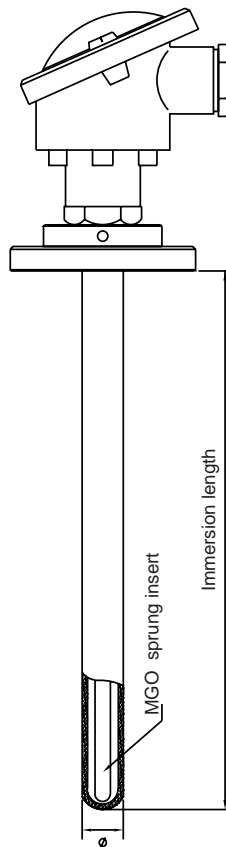

**AC2 C**  
with welded fitting

