




Main characteristics


- Max. temperature limit: - 40 ... + 250° C
(see table for thermocouple cable used)
- Reference tolerances:
Standards IEC 584.2 class 2:
for type J, K: $\pm 2.5^{\circ} \text{C}$ (- 40 ... + 333° C)
- Cable to DIN standard
- Highly versatile
- Low cost

MODELS

TC1 A: without mount



TC1 B: with sliding mount

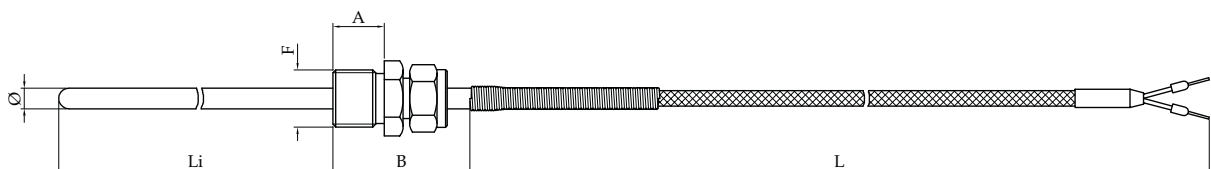

TC1 C: with welded mount

