




Main features


- Temperature limits:
 - 40 ... + 350°C for type T
 - 40 ... + 550°C for type J
 - 40 ... + 600°C for type E
 - 40 ... +1050°C for type K(see table for sheath diameters)
- Tolerance:
UNI 7938, IEC standards 584.2/Class 2:
- Mineral insulated interchangeable insert
- Application versatility

MODELS

TC2 A
without fitting

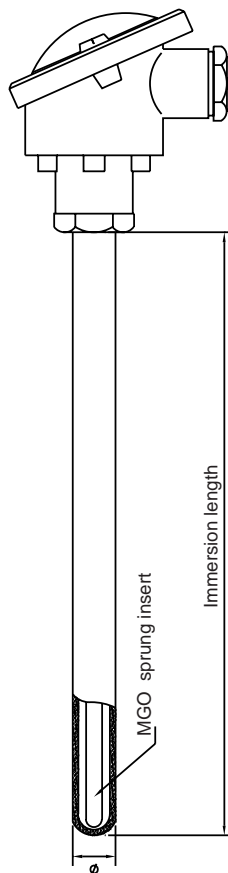

TC2 B
with adjustable flange

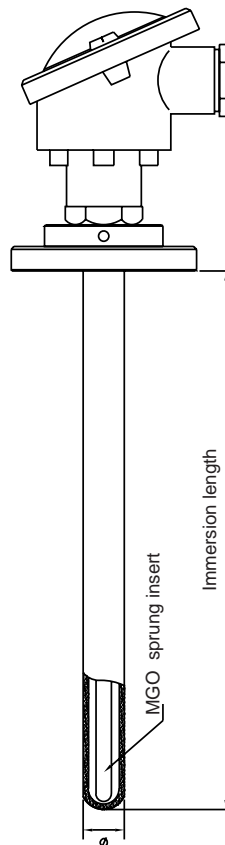

TC2 C
with welded fitting

