



Main features


- Temperature limits:
 - 40 ... +750°C for type J
 - 40 ... +900°C for type E
 - 40 ... +1000°C for type K
 (see table for sheath diameters)
- Tolerance (IEC standard 584.2/Class 2):
 - $\pm 2,5^{\circ}\text{C}$ (-40 ... +333°C)
 - $\pm 0.0075 [t]$ ($t > +333^{\circ}\text{C}$)
- Ceramic insulation of the thermocouple element
- Application versatility

MODELS


TC8 A
without fitting



TC8 B
with adjustable flange

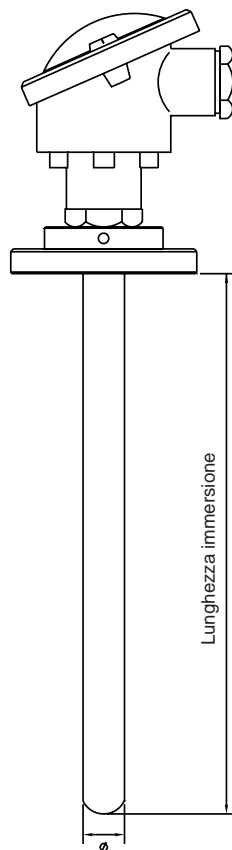

TC8 C
with welded fitting

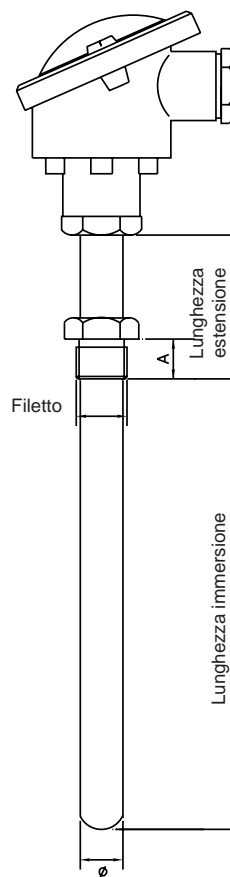

TC8 D
with welded fitting under the head

